Features

A lightweight product with excellent water penetration and retention performance used as a tree planting base and drainage accelerant. Incorporates innumerable cavities where colonies of bacteria can exist, thus providing water purification and deodorization effects. Stepping on the surface causes a crunching sound at a level of 70 dB, thus making it possible to use the product as a crime preventing gravel material for gardens.


Overview (Technical principles, actions, etc.)

The glass foaming agent NEXTONE- α is recycled from used glass bottles discharged from general households. These glass bottles are crushed into impalpable powder. The power is mixed with a forming agent, baked, and cooled down to manufacture NEXTONE- α .

NEXTONE- α is a block in indeterminate form, the maximum size of which is 75 mm or less, and the block has minute pores covered with hard vitreous walls. Like a pumice stone, there are innumerable cavities on the surface of NEXTONE- α . NEXTONE- α is lightweight and easy to handle. NEXTONE- α has the following basic performance characteristics.

- ① A porous lightweight product, the density of which can be minimized when compacted.
- 2 Excellent water penetration, absorption, and retention performance.
- 3 High shear strength. (4) A safe product free of toxic substances that may cause environmental pollution.

Therefore, the product can be applied as a construction material to form a lightweight foundation and tree-planting (rooftop) base or a drainage accelerant or underground drainage material for stadiums and recreation facilities. Besides, the product adsorbs and breaks down phosphorus and ammonia. Therefore, the product can be used as a water purification material or a filtration material for fish preserves and fish farms.

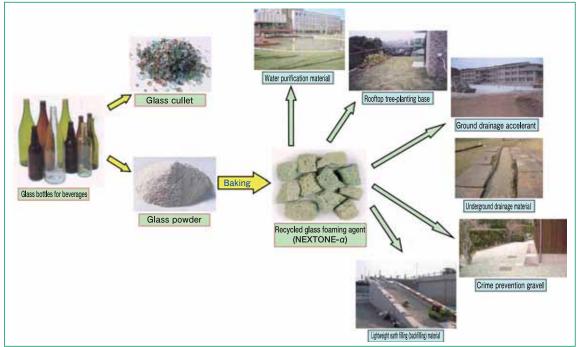

NEXTONE-α application examples

Effects

- \bigcirc NEXTONE- α was applied as a drainage accelerant to the ground of a junior high school in Shimonoseki, the track records of which show that NEXTONE- α has very good drainage performance, thus suppressing the formation of puddles or mud after raining.
- \bigcirc The water examination results of NEXTONE- α blocks used as water purification materials verified that the water was purified at a chemical oxygen demand (COD) rate of 60%, total nitrogen rate of 90%, total phosphorus rate of 85%. The effect of the blocks has not been changed since it was applied one year ago.
- OStepping on the surface causes a crunching sound at a level of 70 dB, thus making it possible to use the product as a crime preventing gravel material for gardens.
- The specific gravity of the recycled glass foaming material can be adjusted between approximately 0.5 and 1.2 if NEXTONE- α blocks are used as lightweight earth filling (backfilling) materials.

Tottori Saishigenka Kenkyusho Kabushiki Kaisha

Business/Engineering Departments

583 Higashisono, Hokuei-cho, Tohaku-gun, Tottori 689-2202

● TEL / +81-858-49-6230 ● FAX / +81-858-49-6288 ● E-Mail / saishigen-525@arion.ocn.ne.jp ● http://www.t-rrl.jp/